

UM -PROFIL

Order No.: 2952020

The illustration shows the article with further components



<http://eshop.phoenixcontact.ae/phoenix/treeViewClick.do?UID=2952020>

Profile housing, in profile width: 25 mm, 45 mm, 72 mm, 100 mm, 108 mm and 122 mm available.

Commercial data

Note	Made-to-order
Pack	1 pcs.
Customs tariff	39162000
Catalog page information	Page 604 (CC-2009)

Product notes

WEEE/RoHS-compliant since:
2004-08-01



Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation at <http://www.download.phoenixcontact.com>. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General

Housing type	Panel mounting base
Housing material	PVC
Color	green

Dimensions/poles

Width	2000 mm
-------	---------

Technical data

Ambient temperature (operation)	-15 °C ... 50 °C
Inflammability class according to UL 94	V0

Accessories

Item	Designation	Description
------	-------------	-------------

Assembly


2959434	UM 25/45-FEO 200	Foot element, is inserted in the profile housing, limit stop with screw. Mounted at right angles to the NS 35/7.5 DIN rail
2907554	UM 45-SEAS	Side supporting element, must be mounted at right angles to the NS 35/7.5 DIN rail to support the housing.
2959382	UM 72-FE	Foot element, 72 mm wide, for mounting on NS 32 or NS 35/7.5, below profile housing UM 72.
2959463	UM108-FE	Foot element, 107.5 mm wide, for mounting on NS 32 or NS 35/7.5, below profile housing UM 108.
2909471	UM122-FE	UM 122 FE foot element, for UM 122 profile housing
2976077	UMK-BF	Mounting flange, for mounting directly on the wall

Marking

5022685	AP-ES	Insert strip, white, Unlabeled, Mounting type: Insert, Lettering field: 35 x 500 mm
1051993	B-STIFT	Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm
1004364	PMB	Phoenix module marker carrier, for labeling modules and PCBs, for hole diameter 3.9 to 4.1 mm, thickness of wall or board 1.5 - 2.0 mm, labeling with insert strips ESL, EST or ES/LP-BW-GB, lettering field: 29 x 8 mm
5031171	SS-ZB WH	Contact marker – zack marker strip, Strip, white, Unlabeled, Can be labeled with: Plotter, Mounting type: Snap into flat marker groove, Lettering field: 20 mm x 8 mm
5031650	SS-ZB YE	Contact marker – zack marker strip, Strip, yellow, Unlabeled, Can be labeled with: Plotter, Mounting type: Snap into flat marker groove, Lettering field: 20 mm x 8 mm
5031744	SS-ZB:SO/CMS	Contact marker – zack marker strip, white, Lettering field: 17.5 x 8 mm

Drawings

Dimensioned drawing

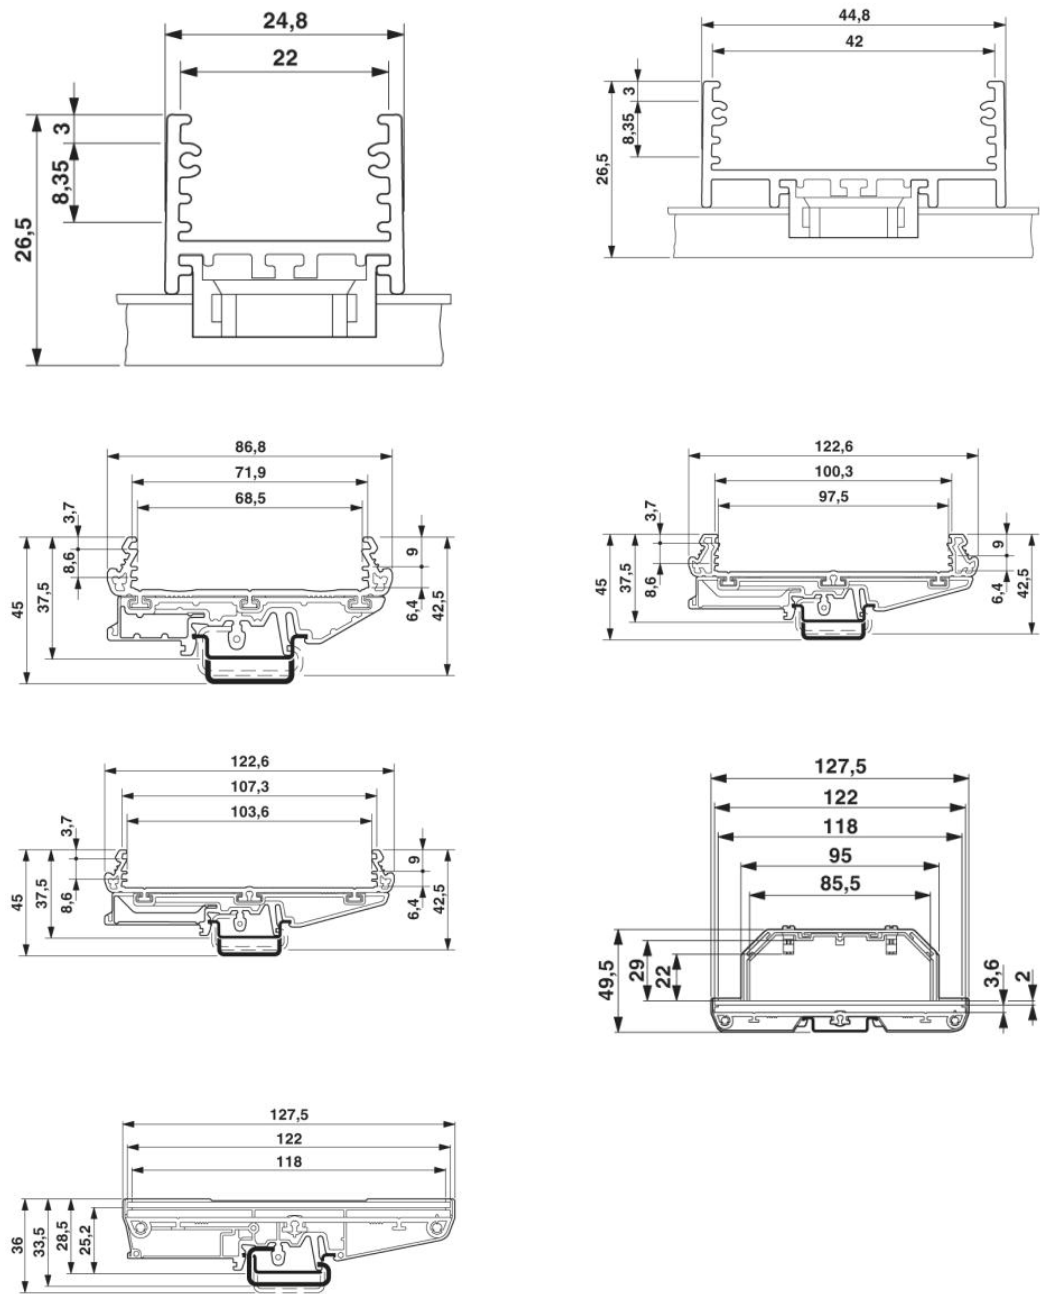

Address

PHOENIX CONTACT Middle East FZ LLC
Office 301, Third Floor, Block 10, Dubai International
Academic City (DIAC)
Dubai, United Arab Emirates
Phone +971 4 437 0324
Fax +971 4 437 0323
<http://www.phoenixcontact.com>

PHOENIX CONTACT Middle East FZ LLC
Technical modifications reserved;